

PFF85-1202

DESCRIPTION

REAR SUBFRAME FRONT BUSH

INSTALLATION GUIDE

Contents (parts per pack):

2 x PFF85-1202 Bushes 1 x PTFE/Silicone Grease

2 x Zinc Plated Outer Shells 2 x Stainless Steel Sleeves

Please read the complete fitting instructions and check package components before fitment. These fitting instructions are to be used as a guide and in conjunction with workshop manual. It is recommended that:


- -all work to be carried out by a licensed technician;
- -all safety precautions adhered to;
- -wheel alignment to be checked and adjusted as required after any suspension work.
- -All fasteners must be tensioned to manufacturer's torque settings.

Fitting Instructions:

- 1. Remove the arm from the car and press out the original bush. Remove any rust or sharp edges from the bore.
- 2. Press the outer shell into the arm in the orientation shown in both Figure 1 and Figure 2.
- 3. Press the bushing into the shell with the thinner lip on the upper side, as shown in Figure 1.
- 4. Apply grease to the bore of the bushing and press the sleeve into place, so it is flush to the top as shown in Figure 2.
- 5. Refit to vehicle and tighten all fasteners to manufacturers torque settings.





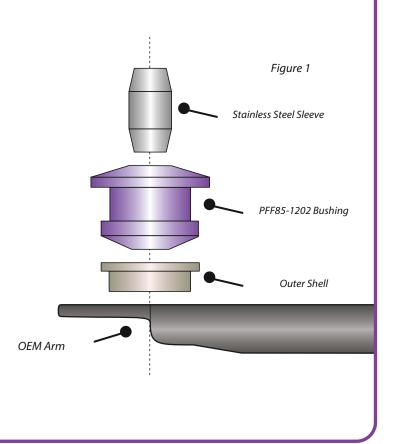

POWERFLEX +44 (0) 1895 460033 sales@powerflex.co.uk www.powerflex.co.uk